


'A'	'B'	'C'	O'RING
24 (.945)	37 (1.457)	45.2 (1.781)	-213
25 (.984)	37 (1.457)	45.2 (1.781)	-214
28 (1.102)	42.8 (1.687)	48.4 (1.906)	-216
30 (1.181)	43 (1.694)	50.8 (2.000)	-217
32 (1.260)	43 (1.694)	50.8 (2.000)	-218
33 (1.299)	49.2 (1.937)	54 (2.125)	-219
35 (1.378)	49.2 (1.937)	54 (2.125)	-220
38 (1.496)	49.4 (1.944)	54 (2.125)	-222
40 (1.575)	55.6 (2.188)	54 (2.125)	3.5X40/-223
43 (1.693)	58.7 (2.312)	55.5 (2.187)	3.5X43/-224
45 (1.772)	58.7 (2.312)	55.5 (2.187)	-224
48 (1.890)	61.9 (2.437)	69.8 (2.750)	-225
50 (1.969)	65.3 (2.572)	60.3 (2.375)	-226
53 (2.087)	68.2 (2.687)	60.3 (2.375)	-227
55 (2.165)	71.6 (2.821)	61.9 (2.437)	-228
58 (2.283)	74.6 (2.937)	63.5 (2.500)	3.5X58/-229
60 (2.362)	74.6 (2.938)	63.5 (2.500)	-229
63 (2.480)	80.9 (3.187)	63.5 (2.500)	-230
65 (2.559)	84.1 (3.312)	65.1 (2.562)	3.5X65/-231
68 (2.677)	87.3 (3.437)	66.7 (2.625)	3.5X68/-232
70 (2.756)	87.3 (3.437)	66.7 (2.625)	-232
75 (2.953)	95.2 (3.750)	69.8 (2.750)	-337
80 (3.150)	98.4 (3.875)	72.2 (2.843)	-339
85 (3.346)	104.8 (4.125)	72.2 (2.843)	-340
90 (3.543)	109.5 (4.312)	76.2 (3.000)	-342
95 (3.740)	114.3 (4.500)	76.2 (3.000)	-343
100 (3.937)	120.6 (4.750)	79.4 (3.125)	-345
110 (4.331)	136.5 (5.375)	82.6 (3.250)	-348

DIMENSIONS IN () ARE INCHES

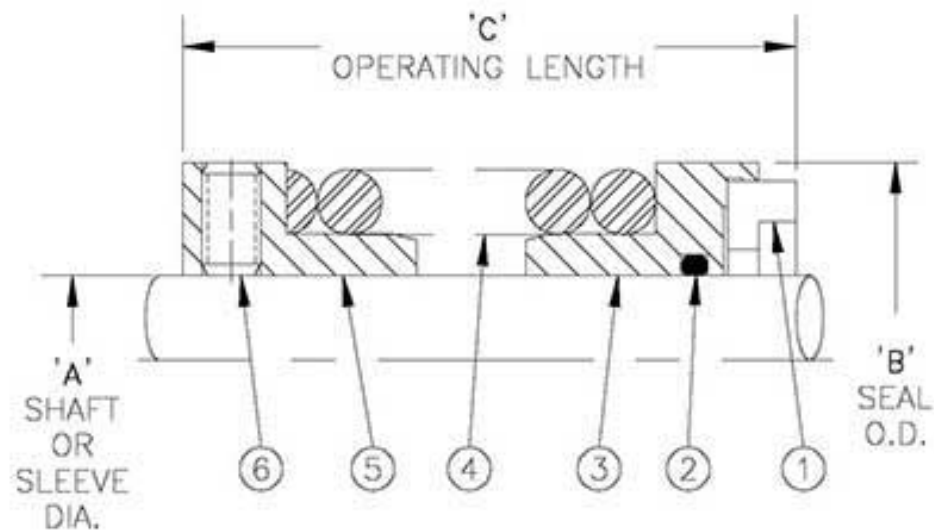

- ① INSERT
- ② O'RING
- ③ ROTARY SEAL RING
- ④ SPRING
- ⑤ SPRING SLEEVE
- ⑥ CUP POINT SET SCREWS

METRIC STYLE 17
UNBALANCED SINGLE
SPRING ROTARY SEAL
RING ASSEMBLY

FLEX-A-SEAL, INC.
P.O. BOX 184/1 JACKSON ST.
ESSEX JUNCTION, VT 05453
(802) 878-8307

B.P.
6/13/97

DRAWING NO.:

SK1314

REV.